




NAHRAB GOSTAR ESHTEHARD

Manufacture of Industrial Valves & relevant equipment

Dismantling Joint

F1

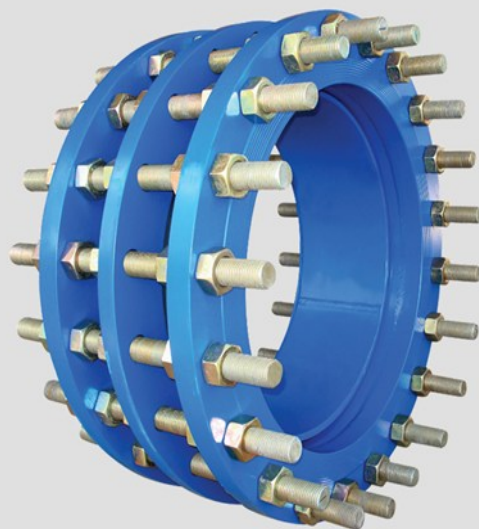


Dismantling Joint – F1 (PN 10)

Coating

Electrostatic Epoxy powder, RAL 5005, 250µm

Material:

ST37-2

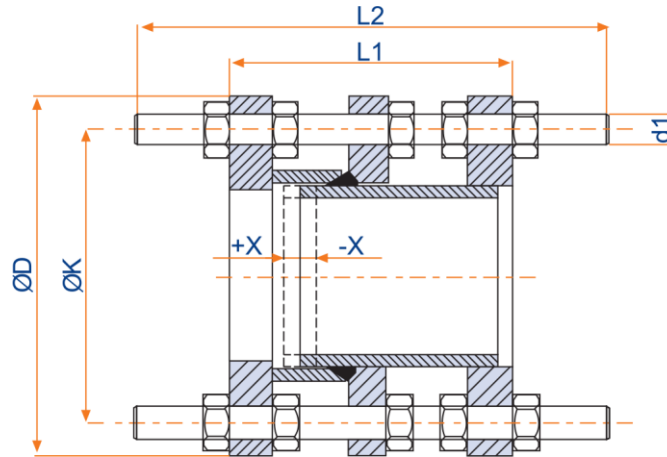

PN 10	DN	D (mm)	K (mm)	L1 (mm)	X (mm)	No.of holes	d1	L2 (mm)	Weight (kg)
	50	165	125	195	±25	4	M16	320	12
	65	185	145	195	±25	4	M16	320	14
	80	200	160	195	±25	8	M16	320	18
	100	220	180	200	±25	8	M16	320	20
	125	250	210	200	±25	8	M16	320	26
	150	285	240	200	±25	8	M20	360	34
	200	340	295	220	±25	8	M20	360	42
	250	395	350	220	±25	12	M20	360	54
	300	445	400	220	±25	12	M20	360	62
	350	505	460	230	±25	16	M20	360	82
	400	565	515	230	±25	16	M24	410	118
	450	615	565	250	±25	20	M24	410	134
	500	670	620	260	±25	20	M24	430	142
	600	780	725	260	±25	20	M27	430	194
	700	895	840	260	±25	24	M27	430	240
	800	1015	950	290	±25	24	M30	480	320
	900	1115	1050	290	±25	28	M30	480	380
	1000	1230	1160	290	±25	28	M33	480	470
	1200	1455	1380	320	±25	32	M36	530	696
	1400	1675	1590	360	±25	36	M39	580	918
	1600	1915	1820	390	±25	40	M45	650	1525
	1800	2115	2020	400	±25	44	M45	650	1582
	2000	2325	2230	410	±25	48	M45	700	2645

Specification for size larger than 2000 mm will be provided as per request


Dismantling Joint – F1 (PN 16)

Coating

Electrostatic Epoxy powder, RAL 5005, 250µm

Material:

ST37-2

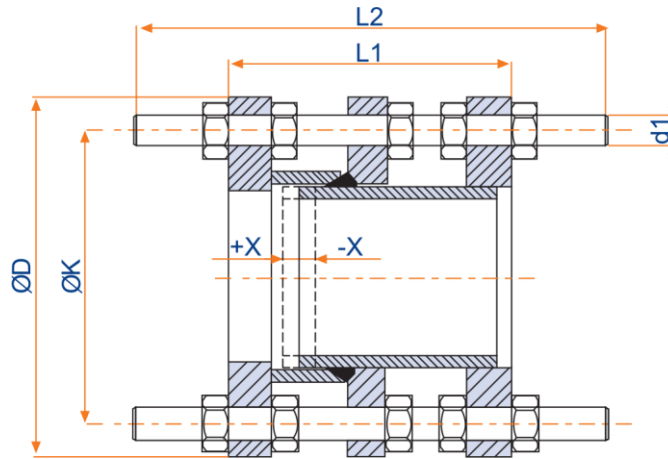

PN 16	DN	D (mm)	K (mm)	L1 (mm)	X (mm)	No.of holes	d1	L2 (mm)	Weight (kg)
	50	165	125	195	±25	4	M16	320	12
	65	185	145	195	±25	4	M16	320	14
	80	200	160	195	±25	8	M16	320	18
	100	220	180	200	±25	8	M16	320	20
	125	250	210	200	±25	8	M16	320	26
	150	285	240	200	±25	8	M20	360	34
	200	340	295	220	±25	12	M20	360	44
	250	405	355	230	±25	12	M24	370	86
	300	460	410	250	±25	12	M24	410	80
	350	520	470	260	±25	16	M24	410	108
	400	580	525	270	±25	16	M27	430	134
	450	640	585	270	±25	20	M27	430	172
	500	715	650	280	±25	20	M30	480	230
	600	810	770	300	±25	20	M33	480	304
	700	910	840	300	±25	24	M33	480	324
	800	1025	950	320	±25	24	M36	530	414
	900	1125	1050	320	±25	28	M36	530	494
	1000	1255	1170	340	±25	28	M39	580	719
	1200	1485	1390	360	±25	32	M45	600	1110
	1400	1685	1590	415	±25	36	M45	700	1350
	1600	1930	1820	445	±25	40	M52	750	1822
	1800	2130	2020	450	±25	44	M52	750	2555
	2000	2345	2230	460	±25	48	M56	800	2645

Specification for size larger than 2000 mm will be provided as per request


Dismantling Joint – F1 (PN 25)

Coating

Electrostatic Epoxy powder, RAL 5005, 250µm

Material:

ST37-2

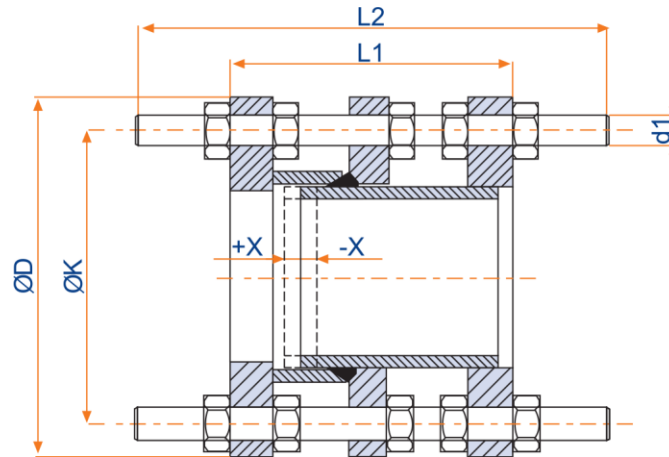

PN 25	DN	D (mm)	K (mm)	L1 (mm)	X (mm)	No.of holes	d1	L2 (mm)	Weight (kg)
	50	165	125	195	±25	4	M16	320	12
	65	185	145	195	±25	8	M16	320	14
	80	200	160	215	±25	8	M16	345	18
	100	235	190	220	±25	8	M20	360	24
	125	270	220	220	±25	8	M24	370	40
	150	300	250	230	±25	8	M24	410	46
	200	360	310	230	±25	12	M24	410	66
	250	425	370	250	±25	12	M27	430	86
	300	485	430	250	±25	16	M27	430	124
	350	555	490	270	±25	16	M30	480	190
	400	620	550	280	±25	16	M33	480	134
	450	670	600	280	±25	20	M33	480	281
	500	730	660	300	±25	20	M36	500	308
	600	845	770	320	±25	20	M39	530	400
	700	960	875	320	±25	24	M45	560	504
	800	1085	990	360	±25	24	M45	650	715
	900	1185	1090	380	±25	28	M45	700	920
	1000	1320	1210	400	±25	28	M52	700	1270
	1200	1530	1420	450	±25	32	M56	750	1870
	1400	1755	1640	490	±25	36	M56	800	2050
	1600	1975	1860	510	±25	40	M56	850	2532
	1800	2195	2070	520	±25	44	M64	880	2965
	2000	2425	2300	545	±25	48	M64	900	3260

Specification for size larger than 2000 mm will be provided as per request



NAHRAB GOSTAR ESHTEHARD

Manufacture of Industrial Valves & Relevant Equipment

Central Office

No.408 , Borj e Sefid (Sefid Tower) ,
Pasdaran ST , Tehran - Iran

Telephone : +98 (21) 27640 -- Fax: +98 (21) 22569144

Factory

4th Takestan , West Ghazali , Aboreyhan BLVD ,
Eshtehard Industrial City
Alborz - Iran

Telephone : +98 (26) 37773930-33 Fax: +98 (26) 37773932

www.nahrab.net

Info@nahrab.net